SELECTED COLLECTION / WOOD-LOOK SPC

SPC Best Sellers

Choose your tone. Compare two wood-look decors and their click systems together on each page.




BRONZE HICKORY / EV-SPC-006

Compare by colour

Dark brown, warm gold, pale natural and cooler greys. Similar tones side by side in the collection, with the click system shown beside every product code. Total thickness includes backing; SPC board thickness includes the wear layer.



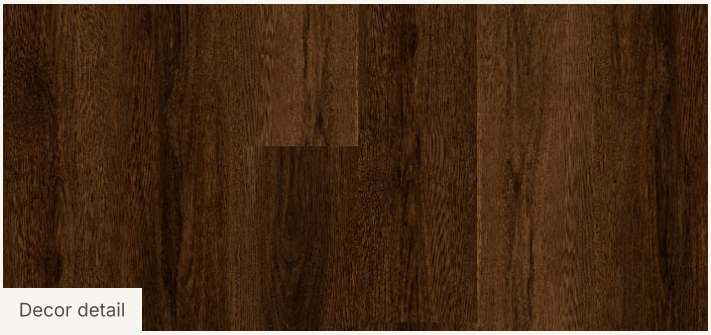

Decor detail

EV-SPC-003

Uniclic


Smoked Umber

Deep brown wood with smoky undertones and fine grain.

Plank format width × length

182 × 1220 mm

Total thickness **4.2 mm**	SPC board incl. wear layer **3.2 mm**
Wear layer **0.30 mm**	Backing **EVA 1.0 mm**
Click system **Uniclic**	Surface **Standard non-EIR**
Protective finish **UV coating**	Edge **Micro bevel**

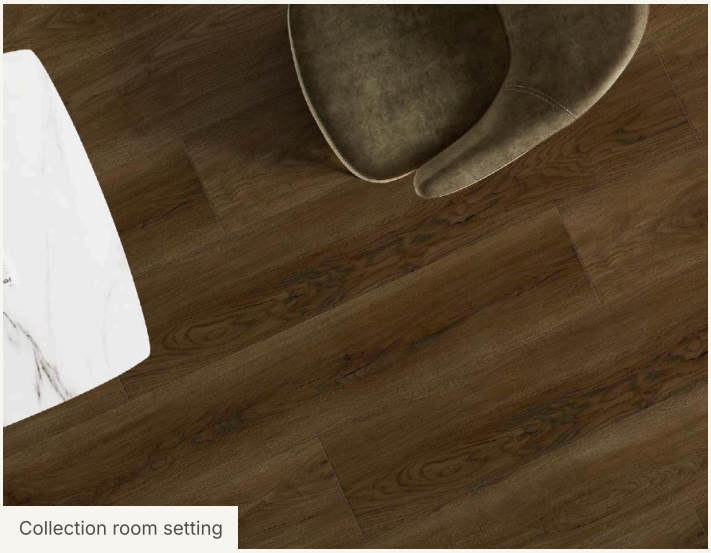

Collection room setting



Decor detail

EV-SPC-041

Välinge 5Gi

Cedarbrook Oak

Deep brown oak tones with pronounced, flowing grain.

Range configuration width × length

181 × 1220 mm

Total thickness **5.0 mm**	SPC board incl. wear layer **4.0 mm**
Wear layer **0.50 mm**	Backing **IXPE 10X 1.0 mm**
Click system **Välinge 5Gi**	Surface **Standard non-EIR**
Protective finish **UV coating**	





Decor detail

EV-SPC-005

Uniclic


Riverbank Oak

Natural oak in a muted brown tone with long, flowing grain.

Plank format width × length

182 × 1524 mm

Total thickness **5.0 mm**	SPC board incl. wear layer **4.0 mm**
Wear layer **0.30 mm**	Backing **IXPE F10 1.0 mm**
Click system **Uniclic**	Surface **Standard non-EIR**
Protective finish **UV coating**	Edge **Micro bevel**

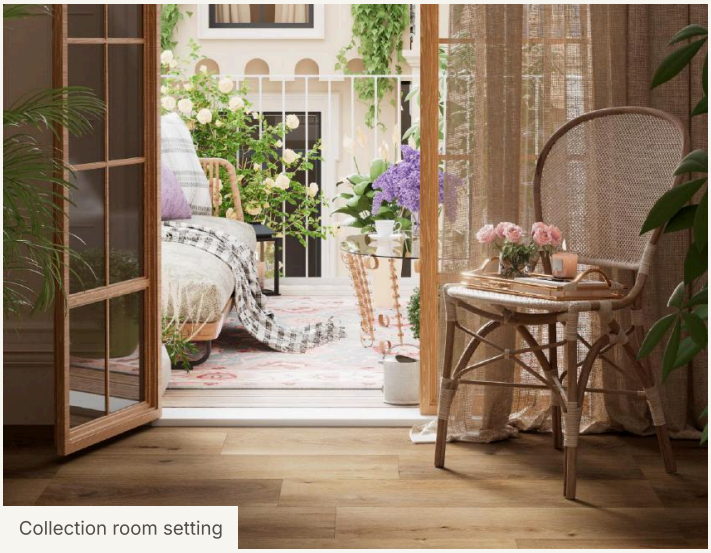

Collection room setting



Decor detail

EV-SPC-042

Välinge 5Gi

Oakmere Brown

Natural mid-brown oak with a warm, settled tone.

Range configuration width × length

181 × 1220 mm

Total thickness **5.0 mm**	SPC board incl. wear layer **4.0 mm**
Wear layer **0.50 mm**	Backing **IXPE 10X 1.0 mm**
Click system **Välinge 5Gi**	Surface **Standard non-EIR**
Protective finish **UV coating**	





Decor detail

EV-SPC-006

Uniclic


Bronze Hickory

Golden hickory with expressive grain and rich board variation.

Plank format width × length

228 × 1524 mm

Total thickness **6.0 mm**	SPC board incl. wear layer **5.0 mm**
Wear layer **0.50 mm**	Backing **IXPE F10 1.0 mm**
Click system **Uniclic**	Surface **Standard non-EIR**
Protective finish **UV coating**	Edge **Micro bevel**

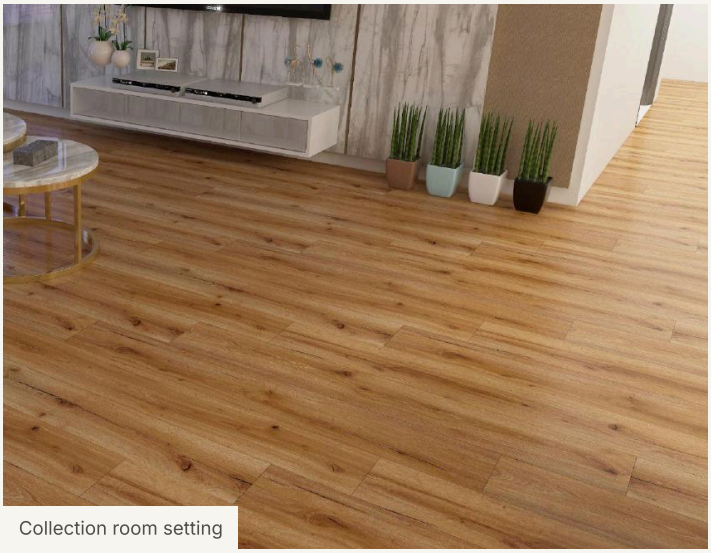

Collection room setting



Decor detail

EV-SPC-026

Välinge 5Gi

Amber Canyon Oak

Warm amber timber with expressive knots and varied grain.

Range configuration width × length

228 × 1520 mm

Total thickness **6.0 mm**	SPC board incl. wear layer **5.0 mm**
Wear layer **0.50 mm**	Backing **IXPE 10X 1.0 mm**
Click system **Välinge 5Gi**	Surface **Standard non-EIR**
Protective finish **UV coating**	





Decor detail

EV-SPC-001

Uniclic

Honey Ridge Oak

Honey-toned oak with gentle knots and a warm, natural grain.

Plank format width × length

182 × 1220 mm

Total thickness **4.2 mm**	SPC board incl. wear layer **3.2 mm**
Wear layer **0.30 mm**	Backing **EVA 1.0 mm**
Click system **Uniclic**	Surface **Standard non-EIR**
Protective finish **UV coating**	Edge **Micro bevel**



Collection room setting



Decor detail

EV-SPC-043

Välinge 5Gi

Suncrest Oak

Honey-gold oak with a fine, flowing grain.

Range configuration width × length

228 × 1520 mm

Total thickness **6.0 mm**	SPC board incl. wear layer **5.0 mm**
Wear layer **0.50 mm**	Backing **IXPE 10X 1.0 mm**
Click system **Välinge 5Gi**	Surface **Standard non-EIR**
Protective finish **UV coating**	





Decor detail

EV-SPC-004

Uniclic

Wheatgrain Pine

Golden pine with soft knots and an even, warm tone.

Plank format width × length

182 × 1220 mm

Total thickness **4.2 mm**	SPC board incl. wear layer **3.2 mm**
Wear layer **0.30 mm**	Backing **EVA 1.0 mm**
Click system **Uniclic**	Surface **Standard non-EIR**
Protective finish **UV coating**	Edge **Micro bevel**



Collection room setting



Decor detail

EV-SPC-044

Välinge 5Gi

Goldenfield Oak

Golden oak tones with gentle knots and natural variation.

Range configuration width × length

181 × 1220 mm

Total thickness **5.0 mm**	SPC board incl. wear layer **4.0 mm**
Wear layer **0.50 mm**	Backing **IXPE 10X 1.0 mm**
Click system **Välinge 5Gi**	Surface **Standard non-EIR**
Protective finish **UV coating**	





Decor detail

EV-SPC-011

Uniclic

Sagewood Oak

Light golden oak with a soft olive tint and flowing grain.

Plank format width × length

182 × 1524 mm

Total thickness **5.0 mm**	SPC board incl. wear layer **4.0 mm**
Wear layer **0.30 mm**	Backing **IXPE F10 1.0 mm**
Click system **Uniclic**	Surface **Standard non-EIR**
Protective finish **UV coating**	Edge **Micro bevel**



Collection room setting



Decor detail

EV-SPC-045

Välinge 5Gi

Softlinen Oak


Light natural oak with a soft, warm grain.

Range configuration width × length

181 × 1220 mm

Total thickness **5.0 mm**	SPC board incl. wear layer **4.0 mm**
Wear layer **0.50 mm**	Backing **IXPE 10X 1.0 mm**
Click system **Välinge 5Gi**	Surface **Standard non-EIR**
Protective finish **UV coating**	



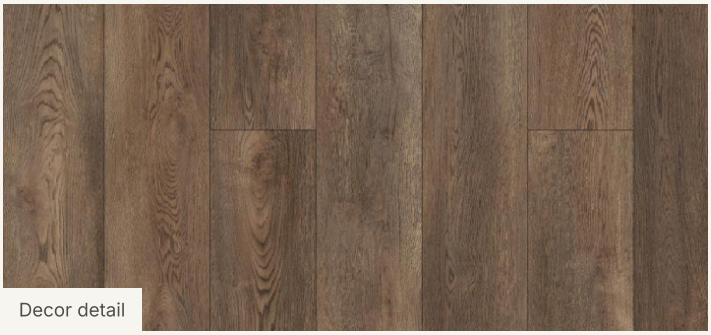

Decor detail

EV-SPC-007

Uniclic

Fawn Oak

Mid-brown oak with softened grey undertones and varied grain.

Plank format width × length

228 × 1524 mm

Total thickness **5.0 mm**	SPC board incl. wear layer **4.0 mm**
Wear layer **0.30 mm**	Backing **IXPE F10 1.0 mm**
Click system **Uniclic**	Surface **Standard non-EIR**
Protective finish **UV coating**	Edge **Micro bevel**



Collection room setting



Decor detail

EV-SPC-046

Välinge 5Gi

Mossbank Oak

Muted taupe oak with flowing grain and subtle knots.

Range configuration width × length

228 × 1520 mm

Total thickness **6.0 mm**	SPC board incl. wear layer **5.0 mm**
Wear layer **0.50 mm**	Backing **IXPE 10X 1.0 mm**
Click system **Välinge 5Gi**	Surface **Standard non-EIR**
Protective finish **UV coating**	





Decor detail

EV-SPC-008

Uniclic

Pewter Grain

Light greige wood with visible knots and flowing grain.

Plank format width × length

228 × 1524 mm

Total thickness **6.0 mm**	SPC board incl. wear layer **5.0 mm**
Wear layer **0.50 mm**	Backing **IXPE F10 1.0 mm**
Click system **Uniclic**	Surface **Standard non-EIR**
Protective finish **UV coating**	Edge **Micro bevel**



Collection room setting



Decor detail

EV-SPC-047

Välinge 5Gi

Featherwood Oak

Light greige oak with natural knots and quiet variation.

Range configuration width × length

228 × 1520 mm

Total thickness **6.0 mm**	SPC board incl. wear layer **5.0 mm**
Wear layer **0.50 mm**	Backing **IXPE 10X 1.0 mm**
Click system **Välinge 5Gi**	Surface **Standard non-EIR**
Protective finish **UV coating**	





Decor detail

EV-SPC-002

Uniclic


Ashen Oak

Soft grey oak with weathered grain and subtle tonal variation.

Plank format width × length

182 × 1524 mm

Total thickness **5.0 mm**	SPC board incl. wear layer **4.0 mm**
Wear layer **0.30 mm**	Backing **IXPE F10 1.0 mm**
Click system **Uniclic**	Surface **Standard non-EIR**
Protective finish **UV coating**	Edge **Micro bevel**

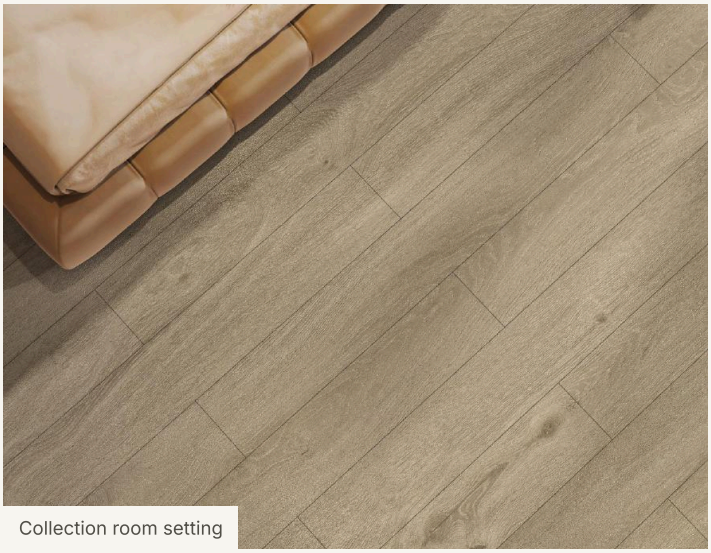

Collection room setting



Decor detail

EV-SPC-048

Välinge 5Gi

Stonewashed Oak


Soft grey-beige oak with delicate, weathered grain.

Range configuration width × length

181 × 1220 mm

Total thickness **5.0 mm**	SPC board incl. wear layer **4.0 mm**
Wear layer **0.50 mm**	Backing **IXPE 10X 1.0 mm**
Click system **Välinge 5Gi**	Surface **Standard non-EIR**
Protective finish **UV coating**	



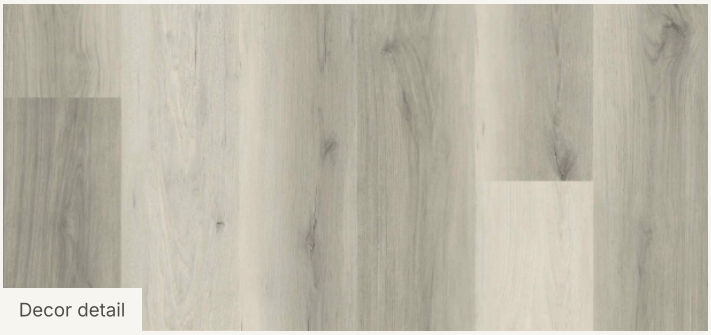

Decor detail

EV-SPC-016

i4F

Tidal Grain

Washed grey wood with a clear contrast between boards.

Plank format width × length

182 × 1220 mm

Total thickness **4.2 mm**	SPC board incl. wear layer **3.2 mm**
Wear layer **0.15 mm**	Backing **EVA 1.0 mm**
Click system **i4F**	Surface **Standard non-EIR**
Protective finish **UV coating**	Edge **Micro bevel**



Collection room setting



Decor detail

EV-SPC-024

Välinge 5Gi

Whitehaven Oak

Pale washed timber with fine lines and a cool neutral tone.

Range configuration width × length

228 × 1520 mm

Total thickness **5.5 mm**	SPC board incl. wear layer **4.5 mm**
Wear layer **0.50 mm**	Backing **IXPE 10X 1.0 mm**
Click system **Välinge 5Gi**	Surface **Standard non-EIR**
Protective finish **UV coating**	

SAMPLES & PRIVATE LABEL

Your next flooring collection

Request samples of your shortlisted decors.
Quote the EV-SPC codes with your enquiry.



Honey Ridge Oak / EV-SPC-001

FLOORING & PANELS

Let’s talk flooring

Nick Popović
info@flooringandpanels.com

Develop a coordinated range with your choice of decors, product specifications and packaging.

Colours and grain are indicative. Physical samples are available on request.